


Traction Feeder Stand-Alone

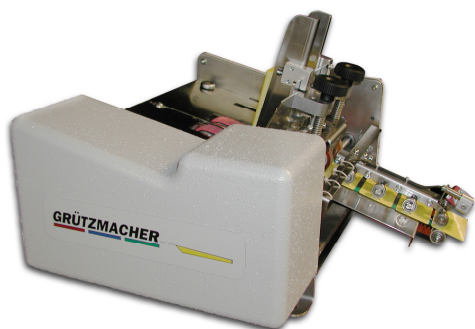

The Traction Feeder is a allround feeder. It operates by bottom fed priciple. Products with a open side are no problem for this feeder.

This feeder is not to be missed on a total machine. Having this feeder in stand alone version the possibilibs and flexibilty can be used where it is needed.

Options

- Standard
- Exit sensor
- Feeder exit plate
- Mechanical double document detection
- Ultrasonic double document detection

Function

- Separating straight materials with suction cups
- Transport through grippers and transportbelts
- Assumption: Materials are separated

Build

- Infeed belts with separation rollers
- Placement on movable standard, adjustable in height

Controlling

- Operated by control panel
- Start-Stop and emergency stop button, single infeed
- Modes: continues or by number, preselection
- Signal interface to connect with all type off machines

Technical specifications

- Speed: up to 15.000 p/h
- Feed width: 350 mm
- Feeder width: 560 mm
- Feeder lenght: 375 mm, with exit plate 525 mm
- Power supply: 0,5 kW, 230 V, 50 Hz
- Dimensions: L 525 x W 560 x H 1200 mm
- Weight: 70 kg

Product dimensions

- Dimensions: min.: 55 x 85 mm
max.: 300 x 350 mm
- Thickness: min.: Single sheet (80g/m²)
max.: 5 mm thick
- Feeder capacity: Up to 500 sheets (80g/m²)
or 200 mm Height



Addressing & Mailing Solutions Ltd
1 Optima Business Park, Pindar Road, Hoddesdon,
Hertfordshire, EN11 0DQ (UK)
Tel: +44(0) 1992 460111 Fax: +44(0) 1992 449111
Email: info@ams-gb.com
Web: www.ams-gb.com