



## Specifications

Model	B-SX4	B-SX5
Technology	Thermal Transfer / direct thermal	
Printhead	Edge type	
Resolution	8 dots/mm (203 dpi)	12.05 dots/mm (306 dpi)
Print Width	Maximum 104 mm	Maximum 127.5 mm
Print Length	Maximum 1,498 mm	
Print Speed	up to 254 mm/sec (10 ips)	up to 203.2 mm/sec (8 ips)
Ribbon Save	Optional	Standard
Interfaces	2 serial ports, Bi-directional parallel port, Expansion I/O*, PCMCIA I/F**, 10/100 Internal LAN I/F**, USB**	
Barcodes	UPC/EAN/JAN, Code 39, Code 93, Code 128, EAN 128, NW7, MSI, Industrial 2 of 5, ITF, Postnet, RM4SCC, KIX-code, RSS14	
2D Codes	Data Matrix, PDF 417, Maxicode, QR code, Micro PDF 417	
Fonts	Bitmap font (21 fonts), Outline font (7 fonts), Writable characters (132 fonts), Optional TrueType fonts (20 types)**	
Optional	Swing cutter module, rotary cutter module, strip module & rewinder***, USB Interface, built-in LAN board, Expansion I/O***, 2-slot-PCMCIA I/F board, RFID kit	
Dimensions	291 mm (W) x 460 mm (D) x 308 mm (H)	
Weight	18 kg (without media and ribbon)	19 kg (without media and ribbon)

\* Option for the B-SX4, \*\* Optional, \*\*\* Standard on the B-SX5



**Your TOSHIBA TEC dealer:**  
Addressing & Mailing Solutions Ltd  
1 Optima Business Park, Pindar Road, Hoddesdon,  
Hertfordshire, EN11 0DQ

Tel: 01992 460111  
Fax: 01992 449111  
Email: sales@ams-gb.com  
Web: http://www.mailing-addressing-machines.co.uk

All company and/or product names are trademarks and/or registered trademarks of their respective owners. All features and specifications described in this brochure are subject to change without notice.

# B-SX4 & B-SX5

## Customers' benefits

The B-SX4/SX5 are packed with advantageous features for the user, including:

- high speed printing leading to increased efficiency and productivity
- time-saving and minimal training due to fast and easy handling
- reduced downtime and increased productivity as a result of high reliability
- minimal repair and recovery costs, and maximised ROI during total life cycle
- perfect readability of labels & barcodes due to built-in high quality print technology
- supplied with Bartender UltraLite labelling software



## TOSHIBA

**TOSHIBA TEC CORPORATION  
RETAIL INFORMATION SYSTEMS  
COMPANY**  
Oval Court Ohsaki Mark East  
2-17-2, Higashi Gotanda, Shinagawa-ku  
JP - TOKYO 141-8664 (Japan)  
barcode.toshibatec.co.jp

**TOSHIBA TEC AUSTRALIA PTY. LTD.**  
7-11 South Street  
AU - RYDALMERE NSW 2116 (Australia)  
T. +61 (0)2 8845 6200  
F. +61 (0)2 9680 0892  
www.toshibatec.com.au

## TOSHIBA TEC EUROPE RETAIL INFORMATION SYSTEMS

www.toshibatec-eu.com

**Austria**  
Handelskai 388/Top 621  
Donau Business Center  
AT - 1020 WIEN  
T. +49 (0)2151 838 01  
F. +49 (0)2151 838 480  
info@toshibatec-eu.de

**Ireland**  
Unit 7, Crumlin Business Centre  
Stannaway drive  
IE - DUBLIN 12  
T. +353 (0)1 465 22 20  
F. +353 (0)1 465 22 29  
info@toshibatec-eu.ie

**Benelux & Headquarters**  
Rue de la Célidée, 33 - Celideestraat 33  
BE - 1080 BRUXELLES/BRUSSEL  
T. +32 (0)2 410 21 00  
F. +32 (0)2 410 68 69  
F. HQ: +32 (0)2 410 79 87  
barcode@toshibatec-eu.be

**Portugal**  
Taguspark - Parque de Ciência  
e Tecnologia  
Nucleo Central - Sala 268  
PT - 2780-920 OEIRAS (Lisboa)  
T. + 351 21 422 20 64  
F. + 351 21 424 02 11  
comercial@toshibatec-eu.pt

**France**  
23/25 Avenue Jeanne d'Arc  
FR - 94117 ARCUEIL Cedex  
T. +33 (0)1 58 07 20 00  
F. +33 (0)1 58 07 20 01  
info@toshibatec-eu.fr

**Spain**  
C/Doctor Esquerdo 207  
ES - 28007 MADRID  
T. +34 91 502 15 90  
F. +34 91 501 81 00  
impresoras@toshibatec-eu.es

**Germany**  
Europark Fichtenhain B15  
DE - 47807 KREFELD  
T. +49 (0)2151 838 01  
F. +49 (0)2151 838 480  
info@toshibatec-eu.de

**UK**  
Campus 300, Spring Way  
Maylands Avenue, Hemel Hempstead  
GB - HERTFORDSHIRE, HP2 7TQ  
T. +44 (0)870 890 7200  
F. +44 (0)870 890 7350  
marketing@toshibatec-eu.co.uk

## GROUP Companies

**TEC Italia, S.r.l. Gruppo Toshiba**  
Sede di Milano  
Via Leonardo da Vinci, 39/D  
IT - 20094 CORSICO MILANO  
T. +39 (0)2 48 60 24 61  
F. +39 (0)2 458 39 30  
info@toshibatec.it

**TEC Polska Sp. z o.o.**  
ul. Marynarska 21  
PL - 02-674 WARSZAWA  
T. +48 (0)22 640 48 58  
F. +48 (0)22 640 48 53  
info@tec.pl

# TOSHIBA

# B-SX4 & B-SX5

3108/03-05 - www.rfd.be



With over 20 years experience in producing barcode label printers the TOSHIBA B-SX4 & B-SX5 thermal transfer/direct thermal industrial printers provide world leading innovation and reliability. Built with the future in mind, the 'RFID Ready' B-SX printers take the barcode label printer to the next level. Ideal for use in all heavy-duty industries including chemicals, manufacturing, pharmaceuticals, textiles, electronics & telecom.

High End High Quality Industrial Printers

# TOSHIBA

The B-SX4 and B-SX5 combine ease-of-use with a very low total cost of ownership making them the ideal choice of flexible industrial printers.



▲ UHF RFID antenna



### Speed

High-speed printing is of course the norm. But the overall throughput is enhanced by a fast 32 bit RISC CPU (SH-3 88 MHz), 8/16 MB DRAM image buffer, and 4 MB Flash Memory for programs and large data file storage.


### Ease of use

Access to print head, platen, paper path and sensors is made quick and easy by the wide opening mechanism. A CD-ROM is provided with the

printer that includes the Owners manual in several languages, technical manuals (Programming, Supply, etc.), BarTender UltraLite label printing software and Windows drivers - which all make the user's life easier.

### High print quality

TOSHIBA's very own print heads - 203 dpi on the B-SX4 and 306 dpi on the B-SX5 - make these machines unique in the market. Innovations provided by the use of these print heads include high-precision heat history control in 7 stages, a new hyper heater mechanism and improved alpha protection layer. The superb clarity of these print heads is further enhanced by the new linear torque control of the TOSHIBA TEC double ribbon motor system. The on-the-fly ribbon save function

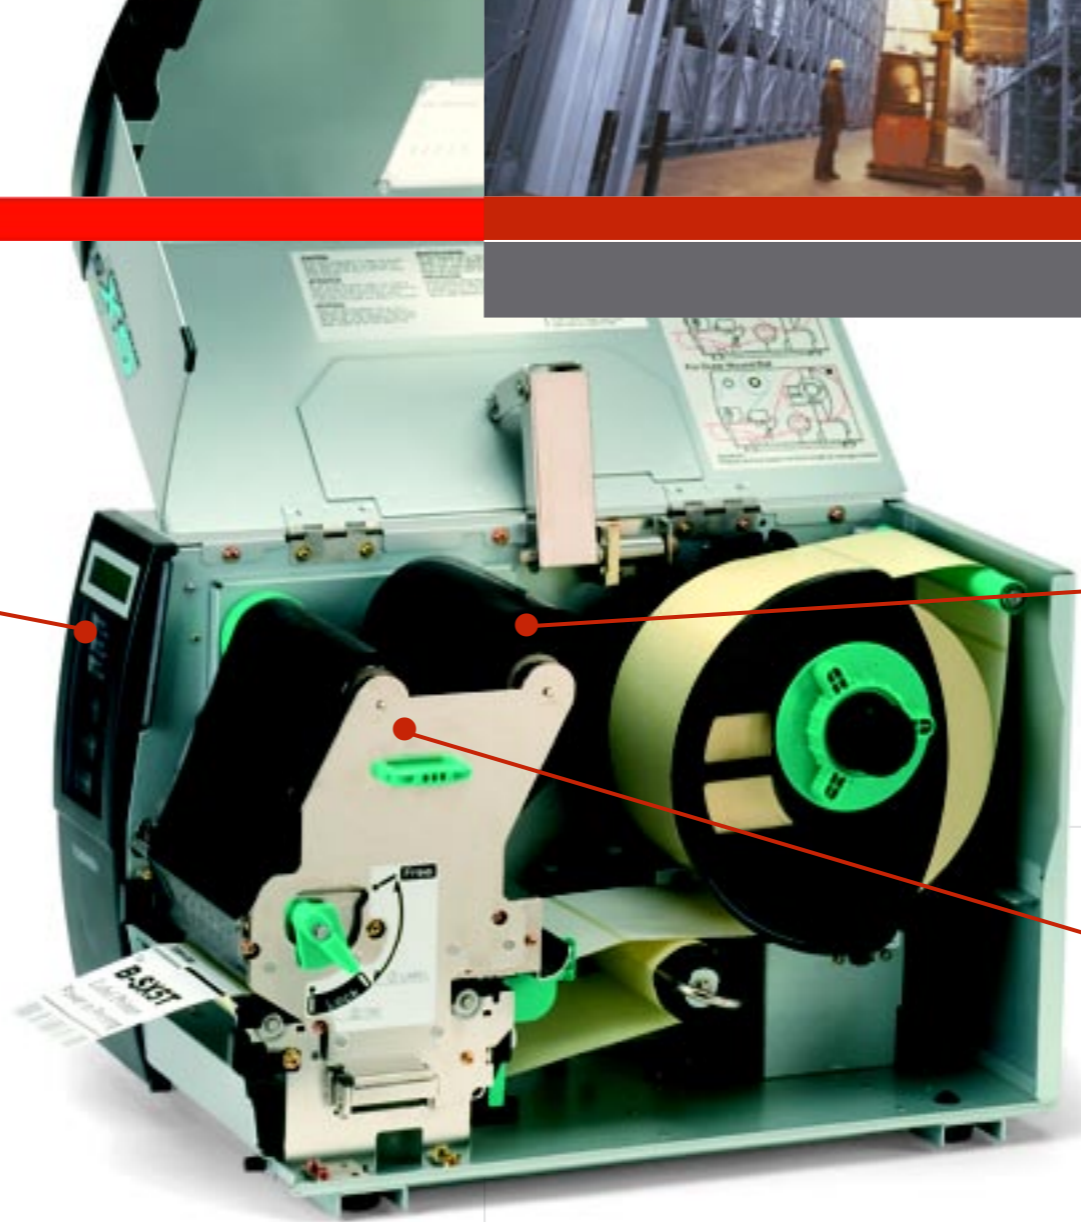

B-SX4 & B-SX5



Suitable Applications

- Manufacturing
- Automotive
- Chemical Industry
- Pharmaceutical Industry
- Textile Industry
- Electronics
- Telecommunications
- Food Sector
- Retail Distribution
- Transport and Logistics
- Healthcare
- Utilities
- Government

### RFID

RFID Technology satisfies the growing requirements of supply chain management. Data, text, barcodes and graphics can still be printed on labels in the usual way, but at the same time complementary information is stored on integrated circuits utilising radio frequency, ready for future reading or editing as required. In fact these printers treat the addition of RFID data as just another barcode. So for the user or programmer no knowledge of RFID is necessary. Just send the data as part of a label format and the printer does the rest.

#### HF 13.56 MHz

(only available in Europe)  
The B-9704-H1-QP option enables the printer to encode chips at 13.56 MHz. Current supported chips are C210, C220, C240, C270 (I-Code), Tag-It and ISO15693. ISO18000 type 3 will be added in the near future.

#### UHF 869.5

The B-9704-U1-QP option enables the printer to encode chips at 869.5 MHz. Current supported chips are EPC Class0, Class1 and ISO-18000-6-B. EPC Class 0+, GEN2 will be available in the near future.

# Fast, reliable, easy and compatible at a lower total cost of ownership

### Enhanced Features

Internet, E-mail, FTP, XML, RFID and BCI.

The enhanced functions offer many advantages including:

- remote printing and technical support
- less costly software integration thanks to standardised XML data exchange
- remote label format installation and updating (web print spooling)
- efficient notification of errors and events
- data manipulation and processing using the BCI

### Basic Command Interpreter

The BCI can run Basic programs allowing the manipulation of incoming print data to generate the correct label formats. This allows the printer to be connected

to existing legacy systems eliminating the need for costly software changes. The BCI can also communicate with external devices allowing the easy integration of other technology systems.

### Easy connectivity

The B-SX4/SX5 printers have an array of interface options:

Standard	Optional
1 external RS232C port 1 internal RS232C port for RFID	Expansion I/O
ECP Parallel port (Centronics)	USB v1.1 port
	Built-in LAN board 10/100 Base
	2-slots PCMCIA interface board
	Wireless LAN 802.11b card
	RFID Enabled

allows ribbons to be saved without a detrimental effect on throughput (an option on the B-SX4). The TOSHIBA print heads also extend the print head life (100 km life time).

### Reliability

A field-proven heavy-duty steel cabinet and a robust inner mechanism combine to ensure the incredible reliability of the B-SX4 and B-SX5. Several technological advances mean more performance and functionalities at a competitive price.

### Full compatibility

Software and supplies are compatible with TOSHIBA TEC's previous models - the B-X printer range produced under the TEC brand.